






# SUPERIOR ECO TILES



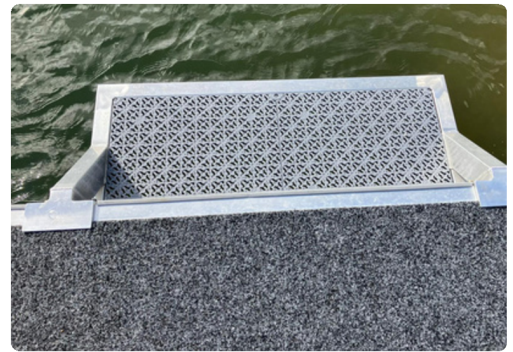




## PRODUCT GUIDE



### Product Highlights

-  Australian made from UV resistant PP
-  Tested to comply with AS1657-20018
-  Suitable for board walks, existing and new gangways, pontoons and platforms
-  Easy and quick to install and dismantle if required

### Features & Benefits

-  Slip and fire resistant, chemical and hydrocarbon resistance
-  Load rating (per square metre) of 5kPa
-  Perforated decking surface allows light penetration through to preserve the flora and fauna
-  High force resistance against impact and static loads
-  Extremely resistant to weather conditions
-  Aesthetically pleasing
-  Recyclable at end of life



**MIA Marina of the Year Award WINNER**  
BMT Environmental Award

# SUPERIOR ECO TILES

## PRODUCT GUIDE



## Accessories & Dimensions



Decking tile fixing full circle (in between 4 tiles)



Decking tile fixing half circle (in between 2 tiles)



Decking tile quarter circle (end cap)



Connection screw for fixing to aluminium



Connection screw for fixing to timber



Tile to tile connection peg (2/tile to tile connection)



Size: 495mm x 595mm x 50mm +3



Weight: 3.0kg



Standar colour: Pontoon Grey.  
Other colours available



## Other colours available:

